



Datenblatt - Fiche technique - Data sheet

11.03.1592




ROLINE Ext.eSATAp-22Pin SATA Adapterkabel, 5/12V, 1,0m

ROLINE Adaptateur externe eSATAp-22P - SATA 5/12V, 1,0 m

ROLINE External eSATAp to 22-Pin SATA Adapter, 5/12V, 1 m

Rev.	Ecn#	Date	Description	App.
A	None		Initial	

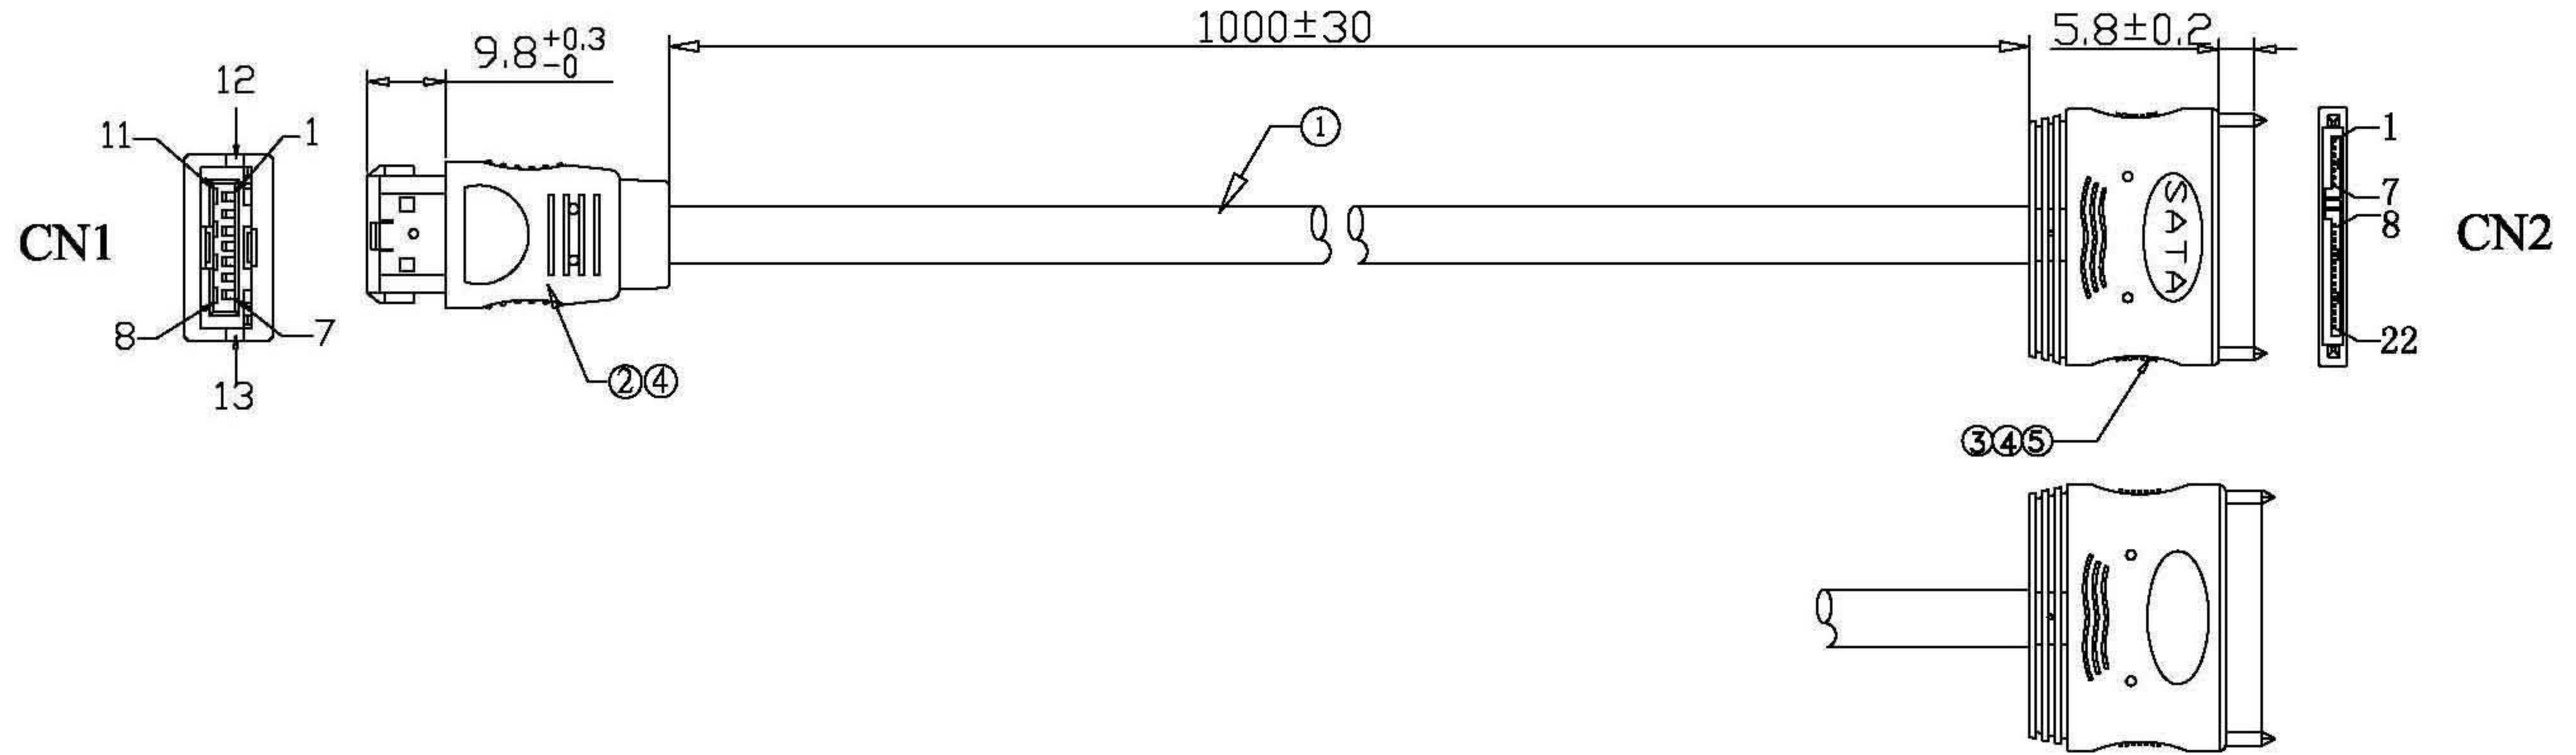

ESATA OUT MODEL:FHT-422
SATA 22P OUT MODEL:FHT-498

RoHS Compliant

ELECTRICAL SPECIFICATION:
1.CABLE MUST PASS CONTINUTY TEST

PIN ASSINGMENT:

CN1	CN2
1+4+7+11+12+外壳	1+4+7 11.12.13+17.18.19
2	2
3	3
5	5
6	6
8	14,15,16
13	20.21.22

⑤	PE1	8 g	LD-PE, WHITE
④	PVC1	35 g	45P PVC COLOR:BLACK(FH-BK01)
③	CN2	1 PCS	SATA22P FEMALE PIN:PLATED GOLD FLASH #BLACK.(YONGHANG)
②	CN1	1PCS	Dualpower ESATA CONN,PIN:G/F #BLACK,SHELL:NICKEL PLAED.
①	CABLE	1 PCS	UL2725CABLE(32AWG*2C+2D+AL+MY)*2C+24AWG*2C+26AWG*2C+FABP OD:5.8MM,COLOR:BLACK PVC JACKET(FH-BK01)(COPARTNER)
Item	LOCATION	QTY	DESCRIPTION

TOLERANCES		ROTRONIC CO., LTD.		
X	± 0.1	APPROVED BY:	DATE:	PART NO:
X	± 0.2			11.03.1592
XX	± 0.3	CHECKED BY:	DATE:	DESCRIPTION:
XXX	±			Power eSATA 5V/12V to eSATA 7+15pin - B Type 100cm
X'	±	COUNTERCHECK BY:	DATE:	
X	±	DRAWN BY:	DATE:	
SCALE:	UNIT:			
NONE	mm			
SPECIFICATION USED ONLY				SHEET: 1 OF 1